




## Technical Data Sheet

# Alpha 45

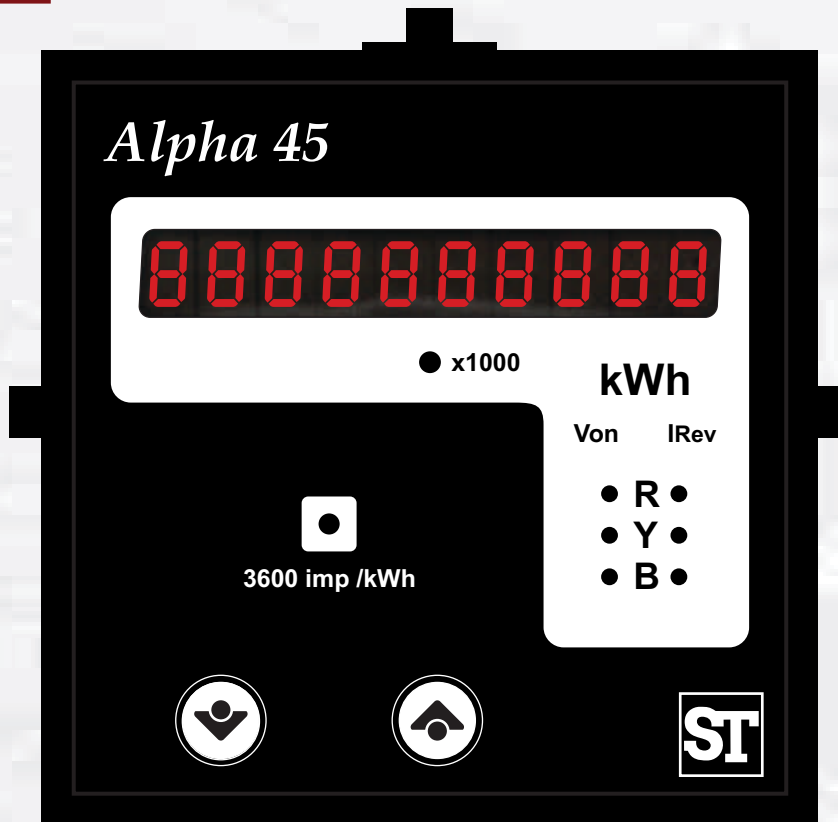

*Alpha 45* is a compact multifunction instrument which is a 96mm x 96mm panel mounted kilowatt hour meter it measures active energy with class 1.0 accuracy having auto-resetting 8 digit seven segment LED counter.

### Special Features

- Available in 3 phase 4 wire , 3 phase 3 wire and single phase version
- Indication: Healthy phase, Reverse Current
- Applicable to Standards IEC 62053-21
- 8 Digit auto-ranging auto-resettable seven segment LED display counter
- Fully programmable CT ratios
- Fully programmable PT ratios
- Built in transient protection
- Remote data reading through MODBUS (RS-485)

## Application

**Alpha 45** is a 96mm x 96mm panel mounted kilowatt hour meter it measures active energy with class 1.0 accuracy having auto-resetting 8 digit seven segment LED counter. The unit provides LED indication for healthy phase, load reverse current. The Alpha 45 is available in two version 3phase 4 wire / 3 wire unbalanced load and single phase and is ideal for secondary metering in industrial applications.

## Product Features

|   |   |   |   |
|---|---|---|---|
| <b>3 phase voltage status</b>                       | Three indications are provided, one for each voltage phase. Three illuminated indication indicate active monitoring of each of the three phases. In case if any one phase voltage is missing the appropriate indication will switch 'OFF' .However the meter will continue to accurately measure energy for the available voltage phases. In case of phase sequence error all three indication will start blinking. | <b>Programmable Energy format &amp; Energy rollover count</b> | Customer can assign the format for energy display on MODBUS (RS-485) in terms of W, kW or MW. Additional to this, customer can also set a rollover count from 7 to 14 digits (for W), 7 to 12 digits (for kW) & 7 to 9 digits (for MW), after which the energy will roll back to zero. The above settings are applicable for all types of energy. |
| <b>Reverse connected current transformer</b>        | Three indications are provided for each of three phases. Illumination of the indication indicates a reverse connected CT.<br><br>The meter will continue to register the energy consumption even if the CT's are reverse connected.   | <b>Parameter Screen recall</b>                                | In case of power failure, the instrument memorizes the last displayed screen. The displayed screen will get memorized only if user keeps this screen for minimum 40 sec duration before power failure for fixed screen mode.  |
| <b>Pulse Indication</b>                             | The unit features a red LED pulse indicator which flashes at rate proportional to measured power (3600 impulses / kWh). This is used for verifying calibration of the meter on site.  | <b>Configuration of the Instrument via MODBUS</b>             | The instrument settings can be configured locally via front panel keys by entering into Programming mode or remotely via MODBUS (RS485).<br><br>Note: The MODBUS communication parameters can only be set locally via front panel keys in the Programming mode.   |
| <b>Energy Count storage</b>                         | In case of power failure, the instrument memorizes the last energy count. Every 40 sec, the instrument updates the energy counter in the non-volatile memory.   | <b>User Assignable Registers for MODBUS</b>                   | Customer can assign MODBUS register address as per his need for faster response time.   |
| <b>Compliance to International Safety standards</b> | Compliance to International Safety standard IEC 61010-1- 2001   | <b>Low back depth</b>   | The instrument has very low back depth (behind the panel) of less than 80 mm in spite of optional features like pulse output  |
|   |   | <b>Enclosure Protection for dust and water</b>                | confirms to IP 54 (front face)  |

## Technical Specifications

### Reference conditions for Accuracy

|                            |   |
|----------------------------|---|
| Reference temperature      | 23°C +/- 2°C  |
| Input waveform             | Sinusoidal (distortion factor 0.005)                              |
| Input frequency            | 50 or 60 Hz ±2%   |
| Auxiliary supply voltage   | Rated Value ±1%   |
| Auxiliary supply frequency | Rated Value ±1%   |
| Voltage Range              | 50... 100% of Nominal Value.                                      |
| Current Range              | 10... 100% of Nominal Value.                                      |
| Power Factor               | 0.5 lag....1....0.8 lead  |
| Power                      | 10... 100% of Nominal Current &<br>50... 100% of Nominal Voltage. |

### Accuracy

|   |                        |
|---|------------------------|
| Active energy (kWh)   | 1 % (IEC 62053-21)     |
| Voltage   | ±0.5% of Nominal value |
| Current   | ±0.5% of Nominal value |
| Frequency   | 0.15% of mid frequency |
| Active Power  | ±0.5% of Nominal value |
| Reactive Power  | ±0.5% of Nominal value |
| Apparent Power  | ±0.5% of Nominal value |
| Power Factor  | 1 % of Unity           |
| Phase angle   | 1 % of range           |
| Measurement error is normally much less than the error specified above.<br>Variation due to influence quantity is less than twice the error allowed for reference condition |                        |

### Input Voltage

| Input Voltage         | PT Secondary Settable Range       |
|-----------------------|-----------------------------------|
| 110V L-L (63.5V L-N)  | 100V - 120V L-L (57V - 69V L-N)   |
| 230V L-L (133V L-N)   | 121V - 239V L-L (70V - 139V L-N)  |
| 415V L-L (239.6V L-N) | 240V - 480V L-L (140V - 277V L-N) |


### Input Current

|                          |  |
|--------------------------|--|
| Nominal input current    | 1 or 5A AC RMS<br>(To be specified while ordering) |
| System CT primary values | Std. values up to 4kA (1 or 5 Amp )                |
| Starting Current         | 0.4% of nominal                                    |

### Auxiliary Supply

|                                     |   |
|-------------------------------------|---|
| AC Auxiliary Supply                 | 110 V AC -15% / +20%<br>230 V AC -15% / +20%<br>380 V AC -15% / +20 |
| ACDC Auxiliary Supply               | 100V... 250 V AC DC   |
| DC Auxiliary Supply                 | 12.....48 VDC   |
| AC Auxiliary supply frequency range | 45 to 66 Hz   |

## Dimension Details

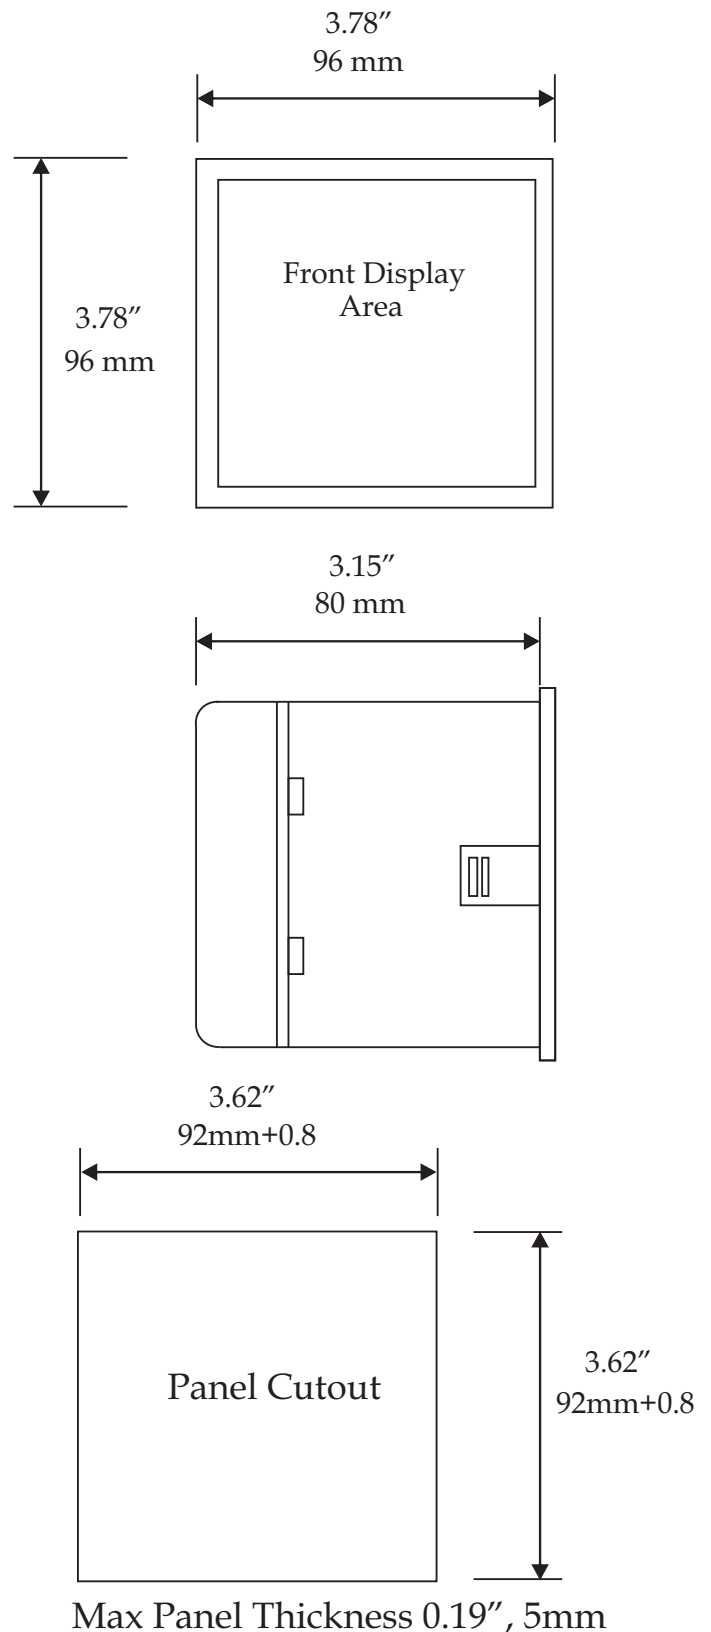

## Technical Specifications

### Overload Withstand

|         |  |
|---------|--|
| Voltage | 2 x rated value for 1 second, repeated 10 times at 10 second intervals |
| Current | 20x for 1 second, repeated 5 times at 5 min                            |

### Operating Measuring Ranges

|              |                           |
|--------------|---------------------------|
| Voltage      | 5... 120% of rated value  |
| Current      | 5 ... 120% of rated value |
| Frequency    | 40...70 Hz                |
| Power Factor | 0.5 Lag ... 1... 0.8 Lead |

### Enclosure style

|                    |  |
|--------------------|--|
| Enclosure style    | 96 X 96 DIN Quadratic  |
| Enclosure material | Polycarbonate (Self extinguishing & non dripping as per UL 94 V-0) |
| Terminals          | M4 Screw Type  |
| Fixing             | 4 side clamps  |

### VA Burden

|                              |                            |
|------------------------------|----------------------------|
| Nominal input voltage burden | < 0.2 VA approx. per phase |
| Nominal input current burden | < 0.6 VA approx. per phase |
| AC Supply burden             | 4 VA                       |

### Counter

|                    |                                   |
|--------------------|-----------------------------------|
| Counter            | 8 digit seven segment LED display |
| Reading resolution | Auto ranging                      |

### Indication

|                   |   |
|-------------------|---|
| Indicator display | 3 : Voltage phase monitoring<br>3 : Reverse connected CT warning. |
| Pulse indicator   | Red LED flashing at a rate proportional to measured power.        |

### Dimension


|              |                                   |
|--------------|-----------------------------------|
| Dimension    | 96mm high x 96mm wide x 80mm deep |
| Panel cutout | 92mm x 92mm                       |
| Weight       | 320-400 gm                        |

### Environmental


|                       |                               |
|-----------------------|-------------------------------|
| Operating temperature | -20 to +70°C                  |
| Storage temperature   | -30 to +80°C                  |
| Relative humidity     | 0... 95% non condensing       |
| Warm up time          | Minimum 3 minute              |
| Shock                 | 15g in 3 planes               |
| Vibration             | 10... 55 Hz, 0.15mm amplitude |
| Enclosure             | IP54 (front face only)        |

## Electrical Connection


### For 3 Phase 4 Wire Unbalanced Load

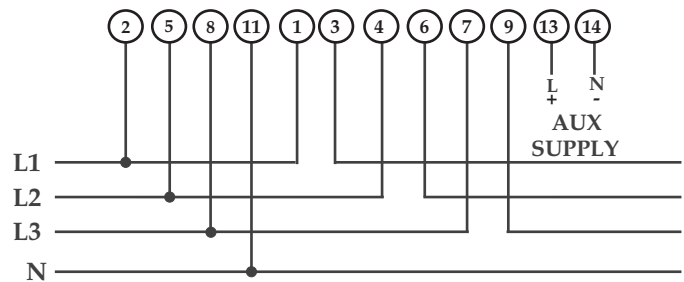

### For 3 Phase 3 Wire Unbalanced Load

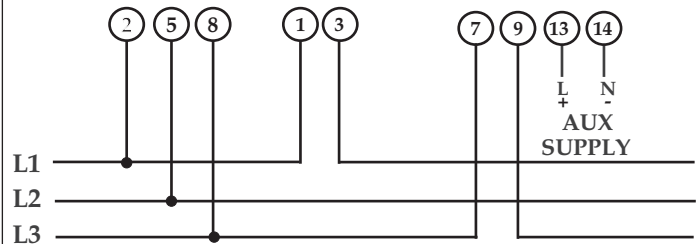

### For Single Phase

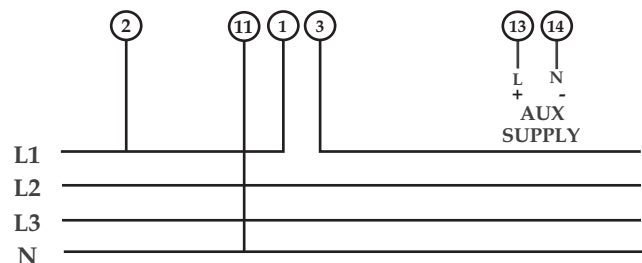

It is recommended that the wires used for connections to the instrument should have lugs soldered at the end. That is, the connections should be made with Lugged wires for secure connections. The Maximum diameter of the lug should be 7.0 mm and maximum thickness 3.5 mm.

Permissible cross section of the connection wires:

$\leq 4.0 \text{ mm}^2$  single wire or  $2 \times 2.5 \text{ mm}^2$  fine wire.

## Technical Specifications

| Applicable Standards  |  |
|-----------------------|--|
| EMC                   | IEC 61326  |
| Immunity              | IEC 61000-4-3, 10V/m min – Level 3 industrial low level      |
| Safety                | IEC 61010-1-2001 , Permanently connected use                 |
| IP for water & dust   | IEC60529   |
| Pollution degree      | 2  |
| Installation category | CAT III 300V ac rms  |
| High Voltage Test     | 2.2 kV AC, 50Hz for 1 minute between all electrical circuits |

| Pulse output   |                             |                                |                               |
|--|-----------------------------|--------------------------------|-------------------------------|
| Relay contact  | 1 NO                        |                                |                               |
| Switching Voltage & current for Relay                                    | 240 VDC ,5 A                |                                |                               |
| Default pulse rate divisor   |                             |                                |                               |
| 1 per Wh (up to 3600W)   | 1 per kWh (up to 3600kWh)   | 1 per MWh (above 3600kW)       |                               |
| Other Pulse rate divisors (applicable only when Energy on RS485 is in W) |                             |                                |                               |
| 10   | 1 per 10 Wh (up to 3600W)   | 1 per 10 kWh (up to 3600kWh)   | 1 per 10 MWh (above 3600kW)   |
| 100  | 1 per 100 Wh (up to 3600W)  | 1 per 100 kWh (up to 3600kWh)  | 1 per 100 MWh (above 3600kW)  |
| 1000   | 1 per 1000 Wh (up to 3600W) | 1 per 1000 kWh (up to 3600kWh) | 1 per 1000 MWh (above 3600kW) |
| Pulse Duration 60 ms, 100 ms, 200 ms                                     |                             |                                |                               |

## Displayed Parameters

| Sr No | Parameters                               | 3 Phase 4 Wire | 3 Phase 3 Wire | 1 Phase 2 Wire |
|-------|--|----------------|----------------|----------------|
| 1.    | Active Energy (kWh) (8 digit resolution) | ✓              | ✓              | ✓              |

## Parameters Through MODBUS (Optional)

| Sr No | Parameters                    | 3 Phase 4 Wire | 3 Phase 3 Wire | 1 Phase 2 Wire |
|-------|-------------------------------|----------------|----------------|----------------|
| 1.    | Active Energy (Wh)            | ✓              | ✓              | ✓              |
| 2.    | System Volts                  | ✓              | ✓              | ✓              |
| 3.    | System Current                | ✓              | ✓              | ✓              |
| 4.    | Volts L1 - N                  | ✓              | ✗              | ✗              |
| 5.    | Volts L2 - N                  | ✓              | ✗              | ✗              |
| 6.    | Volts L3 - N                  | ✓              | ✗              | ✗              |
| 7.    | Volts L1 - L2                 | ✓              | ✓              | ✗              |
| 8.    | Volts L2 - L3                 | ✓              | ✓              | ✗              |
| 9.    | Volts L3 - L1                 | ✓              | ✓              | ✗              |
| 10.   | Current L1                    | ✓              | ✓              | ✗              |
| 11.   | Current L2                    | ✓              | ✓              | ✗              |
| 12.   | Current L3                    | ✓              | ✓              | ✗              |
| 13.   | Frequency                     | ✓              | ✓              | ✓              |
| 14.   | System Active Power (kW)      | ✓              | ✓              | ✓              |
| 15.   | Active Power L1 (kW)          | ✓              | ✗              | ✗              |
| 16.   | Active Power L2 (kW)          | ✓              | ✗              | ✗              |
| 17.   | Active Power L3 (kW)          | ✓              | ✗              | ✗              |
| 18.   | System Re-active Power (kVAr) | ✓              | ✓              | ✓              |
| 19.   | Re-active Power L1 (kVAr)     | ✓              | ✗              | ✗              |

✓ - Available ✗ - Not available

## Parameters Through MODBUS (Optional)

| Sr No | Parameters                  | 3 Phase 4 Wire | 3 Phase 3 Wire | 1 Phase 2 Wire |
|-------|-----------------------------|----------------|----------------|----------------|
| 20.   | Re-active Power L2 (kVAr)   | ✓              | ✗              | ✗              |
| 21.   | Re-active Power L3 (kVAr)   | ✓              | ✗              | ✗              |
| 22.   | System Apparent Power (kVA) | ✓              | ✓              | ✓              |
| 23.   | Apparent Power L1 (kVA)     | ✓              | ✗              | ✗              |
| 24.   | Apparent Power L2 (kVA)     | ✓              | ✗              | ✗              |
| 25.   | Apparent Power L3 (kVA)     | ✓              | ✗              | ✗              |
| 26.   | System Power Factor         | ✓              | ✓              | ✓              |
| 27.   | Power Factor L1             | ✓              | ✗              | ✗              |
| 28.   | Power Factor L2             | ✓              | ✗              | ✗              |
| 29.   | Power Factor L3             | ✓              | ✗              | ✗              |
| 30.   | System Phase Angle          | ✓              | ✓              | ✓              |
| 31.   | Phase Angle L1              | ✓              | ✗              | ✓              |
| 32.   | Phase Angle L2              | ✓              | ✗              | ✗              |
| 33.   | Phase Angle L3              | ✓              | ✗              | ✗              |
| 34.   | Apparent Energy (VAh )      | ✓              | ✓              | ✓              |

✓ - Available ✗ - Not available

## Ordering Information

|                  |                          |   |   |   |   |   |   |   |   |       |
|------------------|--------------------------|---|---|---|---|---|---|---|---|-------|
| Product Code     | AP45-                    | X | X | X | X | X | X | X | X | 00000 |
| System Type      | 3Ph. (PR. 3W or 4W)      | 3 |   |   |   |   |   |   |   |       |
|                  | 1Ph.                     | 1 |   |   |   |   |   |   |   |       |
| Input Voltage    | 220V L-N                 | 1 |   |   |   |   |   |   |   |       |
|                  | 230V L-N                 | 2 |   |   |   |   |   |   |   |       |
|                  | 240V L-N                 | 3 |   |   |   |   |   |   |   |       |
|                  | 300VL-N                  | 4 |   |   |   |   |   |   |   |       |
|                  | 100VL-L                  | 5 |   |   |   |   |   |   |   |       |
|                  | 110V L-L                 | 6 |   |   |   |   |   |   |   |       |
|                  | 220V L-L                 | 7 |   |   |   |   |   |   |   |       |
|                  | 230V L-L                 | 8 |   |   |   |   |   |   |   |       |
|                  | 240V L-L                 | 9 |   |   |   |   |   |   |   |       |
|                  | 380V L-L                 | A |   |   |   |   |   |   |   |       |
|                  | 400V L-L                 | B |   |   |   |   |   |   |   |       |
|                  | 415V L-L                 | C |   |   |   |   |   |   |   |       |
|                  | 440V L-L                 | D |   |   |   |   |   |   |   |       |
|                  | 480V L-L                 | E |   |   |   |   |   |   |   |       |
| Input Current    | 5A                       |   |   |   |   |   |   |   | 5 |       |
|                  | 1A                       |   |   |   |   |   |   |   | 1 |       |
| Power Supply     | 110V AC -15% / +20%      |   |   |   |   |   |   |   | L |       |
|                  | 230V AC -15% / +20%      |   |   |   |   |   |   |   | M |       |
|                  | 380VAC -15% / +20%       |   |   |   |   |   |   |   | H |       |
|                  | 100 - 250V AC/DC +/- 10% |   |   |   |   |   |   |   | U |       |
|                  | 45 - 450V AC/DC +/- 10%  |   |   |   |   |   |   |   | W |       |
|                  | 12V - 48V DC +/- 10%     |   |   |   |   |   |   |   | D |       |
|                  | Self Powered             |   |   |   |   |   |   |   | S |       |
| Pulse Output     | 1 Pulse output           |   |   |   |   |   |   |   | S |       |
|                  | Pulse O/P not used       |   |   |   |   |   |   |   | Z |       |
| RS-485 MODBUS    | With RS-485              |   |   |   |   |   |   |   | R |       |
|                  | Without RS-485           |   |   |   |   |   |   |   | Z |       |
| Terminal Sealing | With Terminal Sealing    |   |   |   |   |   |   |   |   | 1     |
|                  | Without Terminal Sealing |   |   |   |   |   |   |   |   | Z     |
| Accuracy         | Class 1                  |   |   |   |   |   |   |   |   | 1     |
|                  | Class 0.5                |   |   |   |   |   |   |   |   | 5     |



**sifam tinsley**  
PRECISION INSTRUMENTATION

**Sifam Tinsley Instrumentation Inc.**  
3105, Creekside Village Drive,  
Suite No. 801, Kennesaw,  
Georgia 30144 (USA)  
**E-mail Id :** psk@sifamtinsley.com  
**Web :** www.sifamtinsley.com  
**Contact No. :** +1 404 736 4903

**Sifam Tinsley Instrumentation Ltd.**  
Central Buildings, Woodland Close,  
Old Woods Trading Estate,  
Torquay, Devon, England, TQ27BB  
**Web:** www.sifamtinsley.com/uk  
**Contact No. :** +44 (0) 1803 615139